Lecture 9
The quantum Fourier transform

Luís Soares Barbosa
www.di.uminho.pt/~lsb/



Universidade do Minho





UNU EGOV

Quantum Data Science
Universidade do Minho
2026-2027

Recap

The previous lecture discussed an algorithm to extract the phase factor $w \in [0, 1[$ from a generic n-qubit quantum state. Writing w as $\frac{x}{2^n}$, for x an integer representable in n qubits, the estimation process was described by

$$\frac{1}{\sqrt{2^n}} \sum_{y \in 2^n} e^{2\pi i (\frac{x}{2^n}) y} |y\rangle \quad \rightsquigarrow \quad |x\rangle$$

Its inverse


$$|x\rangle \quad \rightsquigarrow \quad \frac{1}{\sqrt{2^n}} \sum_{y \in 2^n} e^{2\pi i (\frac{x}{2^n}) y} |y\rangle$$

obtained by taking the inverses of each gate and building the circuit in reverse order, is QFT, the quantum Fourier transform, a most useful routine in Quantum Computation.

Recap

QFT is formally identical to the discrete Fourier transform.

Recall the Fourier transforms

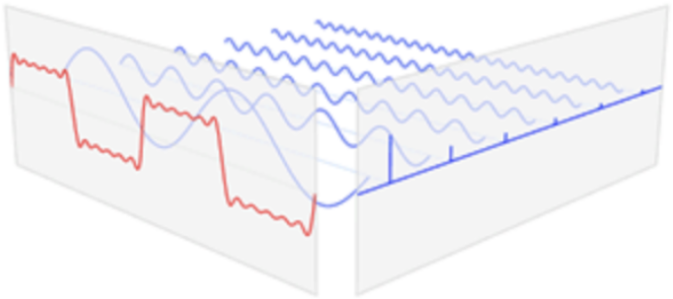

The discrete version maps a sequence of numbers (e.g. samples over time of some process) to another one, of equal length, representing the amplitude and phase of different frequency components
(typically, the coefficients of a trigonometric polynomial which interpolates the sample values)

The quantum Fourier transform

Essentially, the QFT performs a change-of-basis operation which encodes information of computational basis states in local phases.

For 1 qubit state this is exactly what the Hadamard gate accomplishes:

$$H|0\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + 1\,|1\rangle\right) \qquad H|1\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + (-1)\,|1\rangle\right)$$

QFT: 1 qubit

Thus, $QFT_1 = H$:

$$QFT_1 |0\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + 1 |1\rangle \right) \qquad QFT_1 |1\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + (-1) |1\rangle \right)$$

Operation H^{-1} allows to extract information encoded in local phases

$= H$

Exercise

Let $\omega_1 = e^{i2\pi\frac{1}{2}}$. Show that $QFT_1 |x\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_1^{1\cdot x} |1\rangle \right)$

angle of π radians

QFT: 1 qubit

The complex ω_1 represents a rotation of π radians, dividing the unit circle into two slices.

Actually, the two corresponding points in the circle correspond to the 2^{th}-roots of the identity

$$\omega_1^0 = 1 \quad \text{and} \quad \omega_1^1 = e^{\frac{i2\pi}{2}} = e^{i\pi} = -1$$

Note that

$$\omega_1^{1\cdot x} = e^{\frac{i2\pi x}{2}} = e^{i2\pi\frac{x}{2}} = e^{i2\pi(0.x)}$$

as used in the previous lecture.

QFT: 2 qubits

Let $\omega_2 = e^{i2\pi\frac{1}{4}}$

$$QFT_2 |00\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{2\cdot 0} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{1\cdot 0} |1\rangle \right)$$
$$QFT_2 |01\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{2\cdot 1} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{1\cdot 1} |1\rangle \right)$$
$$QFT_2 |10\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{2\cdot 2} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{1\cdot 2} |1\rangle \right)$$
$$QFT_2 |11\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{2\cdot 3} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{1\cdot 3} |1\rangle \right)$$

In general

$$QFT_2 |x\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{2\cdot x} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + \omega_2^{1\cdot x} |1\rangle \right)$$

Exercise

Show that, for $x = x_1 x_2$, $QFT_2 |x\rangle$ can be written as

$$QFT_2 |x\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + e^{i2\pi(0.x_2)} |1\rangle \right) \otimes \frac{1}{\sqrt{2}}\left(|0\rangle + e^{i2\pi(0.x_1 x_2)} |1\rangle \right)$$

QFT: 2 qubits

The basic observation is that or every ω_2-rotation on the second qubit there are *two* such rotations on the first qubit.

Exercise

Compute the phase coefficients in the expressions above and use the Bloch sphere to study $QFT_2 |x\rangle$.

QFT: 2 qubits

Hint

$$\begin{aligned} \omega_2^{2.0} &= 1 & \omega_2^{1.0} &= 1 \\ \omega_2^{2.1} &= -1 & \omega_2^{1.1} &= e^{i\frac{\pi}{2}} \\ \omega_2^{2.2} &= 1 & \omega_2^{1.2} &= -1 \\ \omega_2^{2.3} &= -1 & \omega_2^{1.3} &= e^{i\frac{3}{2}\pi} \end{aligned}$$

Note that the information on $|x\rangle$ previously encoded by vectors pointing to the poles becomes encoded by vectors in the xz-plane

QFT: 2 qubits

In order to derive a circuit for QFT_2, compute

$$
\begin{aligned}
QFT_2 |x\rangle &= \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2\cdot x} |1\rangle \big) \otimes \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{1\cdot x} |1\rangle \big) \\
&= \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2(2x_1+x_2)} |1\rangle \big) \otimes \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2x_1+x_2} |1\rangle \big) \\
&= \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{4x_1+2x_2} |1\rangle \big) \otimes \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2x_1+x_2} |1\rangle \big) \\
&= \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{4x_1}\omega_2^{2x_2} |1\rangle \big) \otimes \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2x_1}\omega_2^{x_2} |1\rangle \big) \\
&= \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2x_2} |1\rangle \big) \otimes \tfrac{1}{\sqrt{2}}\big(|0\rangle + \omega_2^{2x_1}\omega_2^{x_2} |1\rangle \big) \\
&= \underbrace{\tfrac{1}{\sqrt{2}}\big(|0\rangle + (-1)^{x_2} |1\rangle \big)}_{H|x2\rangle} \otimes \underbrace{\tfrac{1}{\sqrt{2}}\big(|0\rangle + (-1)^{x_1}\omega_2^{x_2} |1\rangle \big)}_{\text{some controlled rot. on } H|x1\rangle}
\end{aligned}
$$

QFT: 2 qubits

Define

$$R_2 |0\rangle = |0\rangle \quad \text{and} \quad R_2 |1\rangle = \omega_2 |1\rangle$$

which rotates a vector in the xz-plane $\frac{\pi}{2}$ radians


It yields a controlled-R_2 operation

$$|x\rangle |0\rangle \mapsto |x\rangle |0\rangle \qquad |x\rangle |1\rangle \mapsto R_2 |x\rangle |1\rangle$$

or, equivalently,

$$|0\rangle |y\rangle \mapsto |0\rangle |y\rangle \qquad |1\rangle |y\rangle \mapsto \omega_2^y |1\rangle |y\rangle$$

Putting all the pieces together to derive the QFT circuit for 2 qubits:

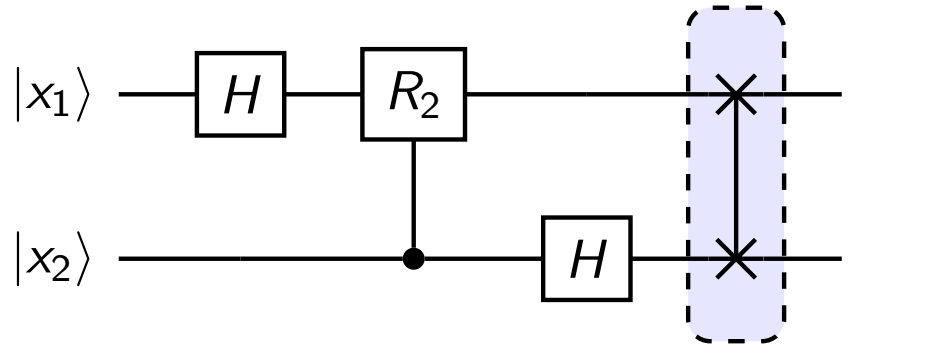

QFT: 3 qubits

$$QFT_3 |x\rangle = \frac{1}{\sqrt{2}} \left(|0\rangle + \omega_3^{4 \cdot x} |1\rangle \right) \otimes \left(|0\rangle + \omega_3^{2 \cdot x} |1\rangle \right) \otimes \left(|0\rangle + \omega_3^{1 \cdot x} |1\rangle \right)$$

for $\omega_n = e^{i 2\pi \cdot \frac{1}{2^n}}$.

N.B.

In the sequel the normalisation factor $\frac{1}{\sqrt{2}}$ will be dropped in each state to increase readability

QFT: 3 qubits

Recalling that a binary number $x_1 \dots x_n$ represents the natural number

$$2^{n-1} \cdot x_1 + \cdots + 2^0 \cdot x_n$$

and that

$$\omega_n^2 = \omega_{n-1} \text{ and } \omega_n^{2^{n-1}} = e^{i\pi} = -1$$

define QFT_3 as follows:

QFT: 3 Qubits

$$
\begin{aligned}
&QFT_3 \left|x\right\rangle \\
&= \left(\left|0\right\rangle + \omega_3^{4\cdot x} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot x} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{1\cdot x} \left|1\right\rangle \right) \\
&= \left(\left|0\right\rangle + (-1)^{x} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot x} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{1\cdot x} \left|1\right\rangle \right) \\
&= \left(\left|0\right\rangle + (-1)^{x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot x} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{1\cdot x} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot(4x_1+2x_2+x_3)} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{1\cdot x} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot(4x_1+2x_2)} \omega_3^{2\cdot x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{1\cdot x} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \left(\left|0\right\rangle + \omega_2^{2\cdot(2x_1+x_2)} \omega_2^{x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{4x_1+2x_2+x_3} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \left(\left|0\right\rangle + \omega_2^{2\cdot(2x_1+x_2)} \omega_2^{x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{4x_1+2x_2} \omega_3^{x_3} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \left(\left|0\right\rangle + \omega_2^{2\cdot(2x_1+x_2)} \omega_2^{x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_3^{2\cdot(2x_1+x_2)} \omega_3^{x_3} \left|1\right\rangle \right) \\
&= H\left|x_3\right\rangle \otimes \underbrace{\left(\left|0\right\rangle + \omega_2^{2\cdot(2x_1+x_2)} \omega_2^{x_3} \left|1\right\rangle \right) \otimes \left(\left|0\right\rangle + \omega_2^{2x_1+x_2} \omega_3^{x_3} \left|1\right\rangle \right)}_{\text{some controlled-rotations on } QFT_2\left|x_1x_2\right\rangle}
\end{aligned}
$$

QFT: 3 qubits

Take $R_3 |0\rangle = |0\rangle$ and $R_3 |1\rangle = \omega_3 |1\rangle$. Intuitively, R_3 rotates a vector in the xz-plane 'one 2^3-th of the unit circle'.
It yields a controlled-R_3 operation defined by

$$|x\rangle |0\rangle \mapsto |x\rangle |0\rangle \text{ and } |x\rangle |1\rangle \mapsto R_3 |x\rangle |1\rangle$$

Equivalently

$$|0\rangle |y\rangle \mapsto |0\rangle |y\rangle \text{ and } |1\rangle |y\rangle \mapsto \omega_3^y |1\rangle |y\rangle$$

Putting all pieces together we derive the QFT circuit for 3 qubits

QFT: 3 qubits


Take $R_3 |0\rangle = |0\rangle$ and $R_3 |1\rangle = \omega_3 |1\rangle$. Intuitively, R_3 rotates a vector in the xz-plane 'one 2^3-th of the unit circle'.
It yields a controlled-R_3 operation defined by

$$|x\rangle |0\rangle \mapsto |x\rangle |0\rangle \text{ and } |x\rangle |1\rangle \mapsto R_3 |x\rangle |1\rangle$$

Equivalently

$$|0\rangle |y\rangle \mapsto |0\rangle |y\rangle \text{ and } |1\rangle |y\rangle \mapsto \omega_3^y |1\rangle |y\rangle$$

Putting all pieces together we derive the QFT circuit for 3 qubits

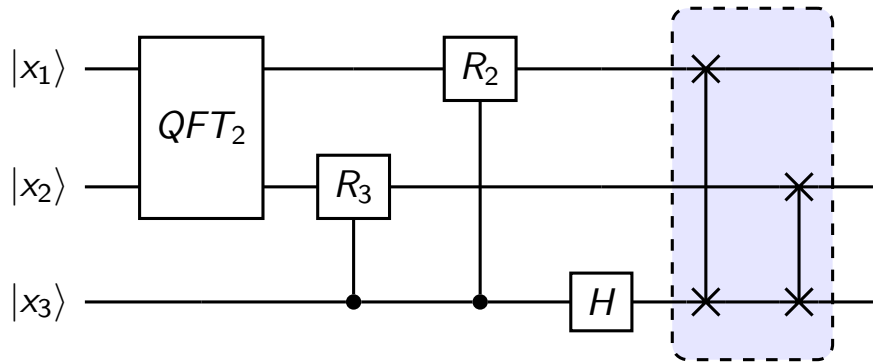

QFT: n qubits

Calculation easily extends to QFT_n (*in lieu* of QFT_3) :

Let $\omega_n = e^{i2\pi \cdot \frac{1}{2^n}}$ (division of the unit circle in 2^n slices)

$$QFT_n |x\rangle = \frac{1}{\sqrt{2}} \left(|0\rangle + \omega_n^{2^{n-1} \cdot x} |1\rangle \right) \otimes \cdots \otimes \left(|0\rangle + \omega_n^{2^0 \cdot x} |1\rangle \right)$$


Take $R_n |0\rangle = |0\rangle$ and $R_n |1\rangle = \omega_n |1\rangle$. Intuitively, R_n rotates a vector in the xz-plane 'one 2^n-th of the unit circle'

It yields a controlled-R_n operation defined by $|x\rangle |0\rangle \mapsto |x\rangle |0\rangle$ and $|x\rangle |1\rangle \mapsto R_n |x\rangle |1\rangle$. Equivalently

$$|0\rangle |y\rangle \mapsto |0\rangle |y\rangle \text{ and } |1\rangle |y\rangle \mapsto \omega_n^y |1\rangle |y\rangle$$

QFT: n qubits

This suggests a recursive definition for the general QFT circuit:

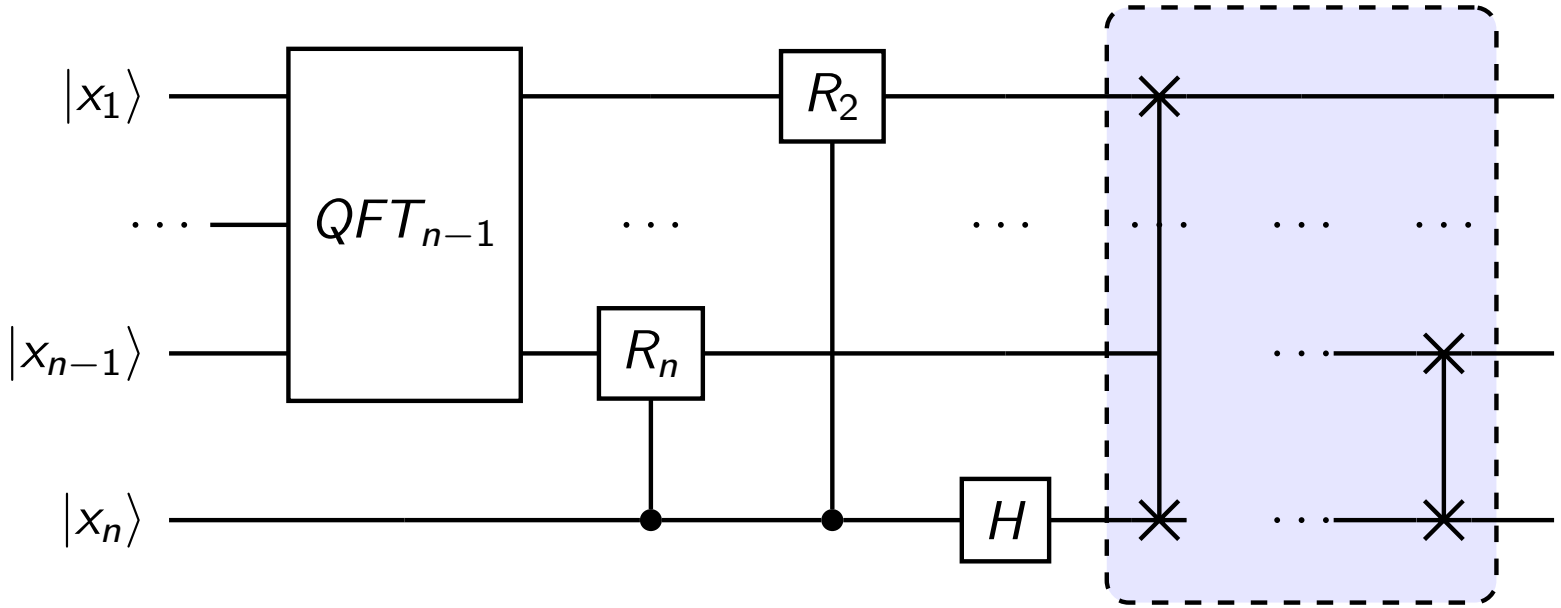

swaps positions of qubits by doing $+1$ in base n

The quantum Fourier transform

Complexity (number of gates)

- one H plus $n-1$ conditional rotations on the first qubit
- one H plus $n-2$ conditional rotations on the second qubit
- ...

$$n + (n-1) + (n-2) + \cdots + 1 = \frac{n(n-1)}{2}$$

- plus $\frac{n}{2}$ swaps (each implemented by 3 CNOT gates)

Thus

$$\frac{n(n-1)}{2} + 3x\frac{n}{2} = \frac{n^2+2n}{2} \approx \mathcal{O}(n^2)$$

The quantum Fourier transform

Complexity (number of gates)

$$\frac{n(n-1)}{2} + 3x\frac{n}{2} = \frac{n^2+2n}{2} \approx \mathcal{O}(n^2)$$

which compares to the classical case for the Fast FT: $\mathcal{O}(n2^n)$

The result is impressive: the quantum version requires exponentially less operations to compute the Fourier transform than the (best) classical one.

- However, typical uses (e.g. in speech recognition) are limited by the impossibility of directly measuring the Fourier transformed amplitudes of the original state.
- This requires a subtler use of QFT in practice: the phase estimation procedure, underlying many quantum algorithms, is one of them.

An equivalent formulation of QFT

Although we have been working with

$$QFT_n |x\rangle = \frac{1}{\sqrt{2}}(|0\rangle + \omega_n^{2^{n-1}\cdot x} |1\rangle) \otimes \cdots \otimes \frac{1}{\sqrt{2}}(|0\rangle + \omega_n^{1\cdot x} |1\rangle)$$

we are already familiar with an equivalent, useful definition

$$QFT_n |x\rangle = \frac{1}{\sqrt{2^n}} \sum_{y=0}^{2^n-1} \omega_n^{x\cdot y} |y\rangle$$

Examples with $n = 1$ and $n = 2$

$$QFT_1 |x\rangle = \frac{1}{\sqrt{2}}(|0\rangle + \omega_1^x |1\rangle)$$
$$QFT_2 |x\rangle = \frac{1}{\sqrt{2^2}}(|00\rangle + \omega_2^x |01\rangle + \omega_2^{2\cdot x} |10\rangle + \omega_2^{3\cdot x} |11\rangle)$$